

Aluminium, reinforced, self-adhesive duct tape

MAJ



Description

In HVAC system uses a self-adhesive reinforced duct tape to hold, glue, seal, and provide a beautiful view of duct connections. Duct tape MAJ improves duct sealing when applied to the joint. The tape is very strong for stretching and tearing. The adhesive duct tape is made of aluminium foil 43 microns thick and covered with 5x5 mm fibreglass mesh. The tape has a high tensile strength, covered with acrylic adhesive. The duct tape is wrapped in silicone paper for easy release of the foil. The rolls of duct tape are available in two widths of 50 mm and 75 mm. Suitable for indoor and outdoor use. The surface must be dry, clean and free of grease.

Aluminium thickness: 43 microns,

Overall thickness: 83 microns,

Adhesive to metal: 15N/25mm, ASTM D3330,

Tensile Force: 100N/25mm, ASTM D 3759,

Elongation: 3.0%,

Bonding temperature: + 10 °C to + 40 °C,


Operating temperature: -35 °C to + 120 °C.

Ordering code



Sample: MAJ50 – aluminium reinforced tape, 50 mm width.

Dimensions

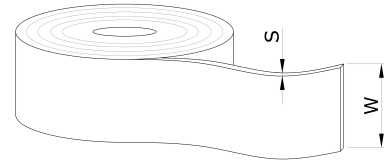

Type	W [mm]	S [mm] (with out protective paper)	L [m/roll]	Mass [kg/roll]
MAJ50	50	0,043	50	0,55
MAJ75	75	0,043	50	0,75