

Suspension band


PTJ



Description

Perforated suspension band is used for fixing ducts to the ceiling or hanging system. The tape is easy to cut off, bend and fasten to the duct using rivets, or screwing the screws through the prepared holes in the tape. The suspension band is made of galvanized sheet steel - corrosion class C2-M/C3-L according to LST EN ISO 12944 standard.

Dimensions

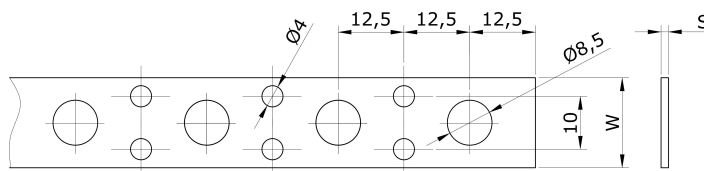

| Type | s [mm] | W [mm] | L [m (roll)] | Mass [kg/m] |
|------|--------|--------|--------------|-------------|
| PTJ | 0,6 | 17 | 25 | 0,07 |

Technical data

| Allowable load [N] | | |
|--------------------|---------------------|------------------------|
| | Ventilation ducts | Smoke extraction ducts |
| Type | Fire resistance EI0 | 600°C, 120 minutes |
| PTJ | 140 N | - |

Ordering code

Product PTJ